





Luminaire Schedule							Calculation Summary						
Symbol	Tag	Description	LLF	Lumens Per Luminaire	Watts Per Luminaire	Qty	Space/Room/Area	Avg	Max	Min	Avg/Min	Max/Min	Workplane
	SLWa	AXCS2A-C WALL PACK FULL CUTOFF	0.910	2589	15.5	3	Parking Lot Hardscape_Planar	0.77	10.1	0.2	3.85	50.50	0
	SLP4-HSS	PRV-PA2A-740-U-T4W-HSS TYPE IV WIDE HOUSE SIDE SHIELD	0.910	11268	112	2							
	(EX) 2	EXISTING HID 250W EQUIVALENT	0.800	9976	277	2							
	(EX)	EXISTING HID 250W EQUIVALENT	0.800	9976	277	2							

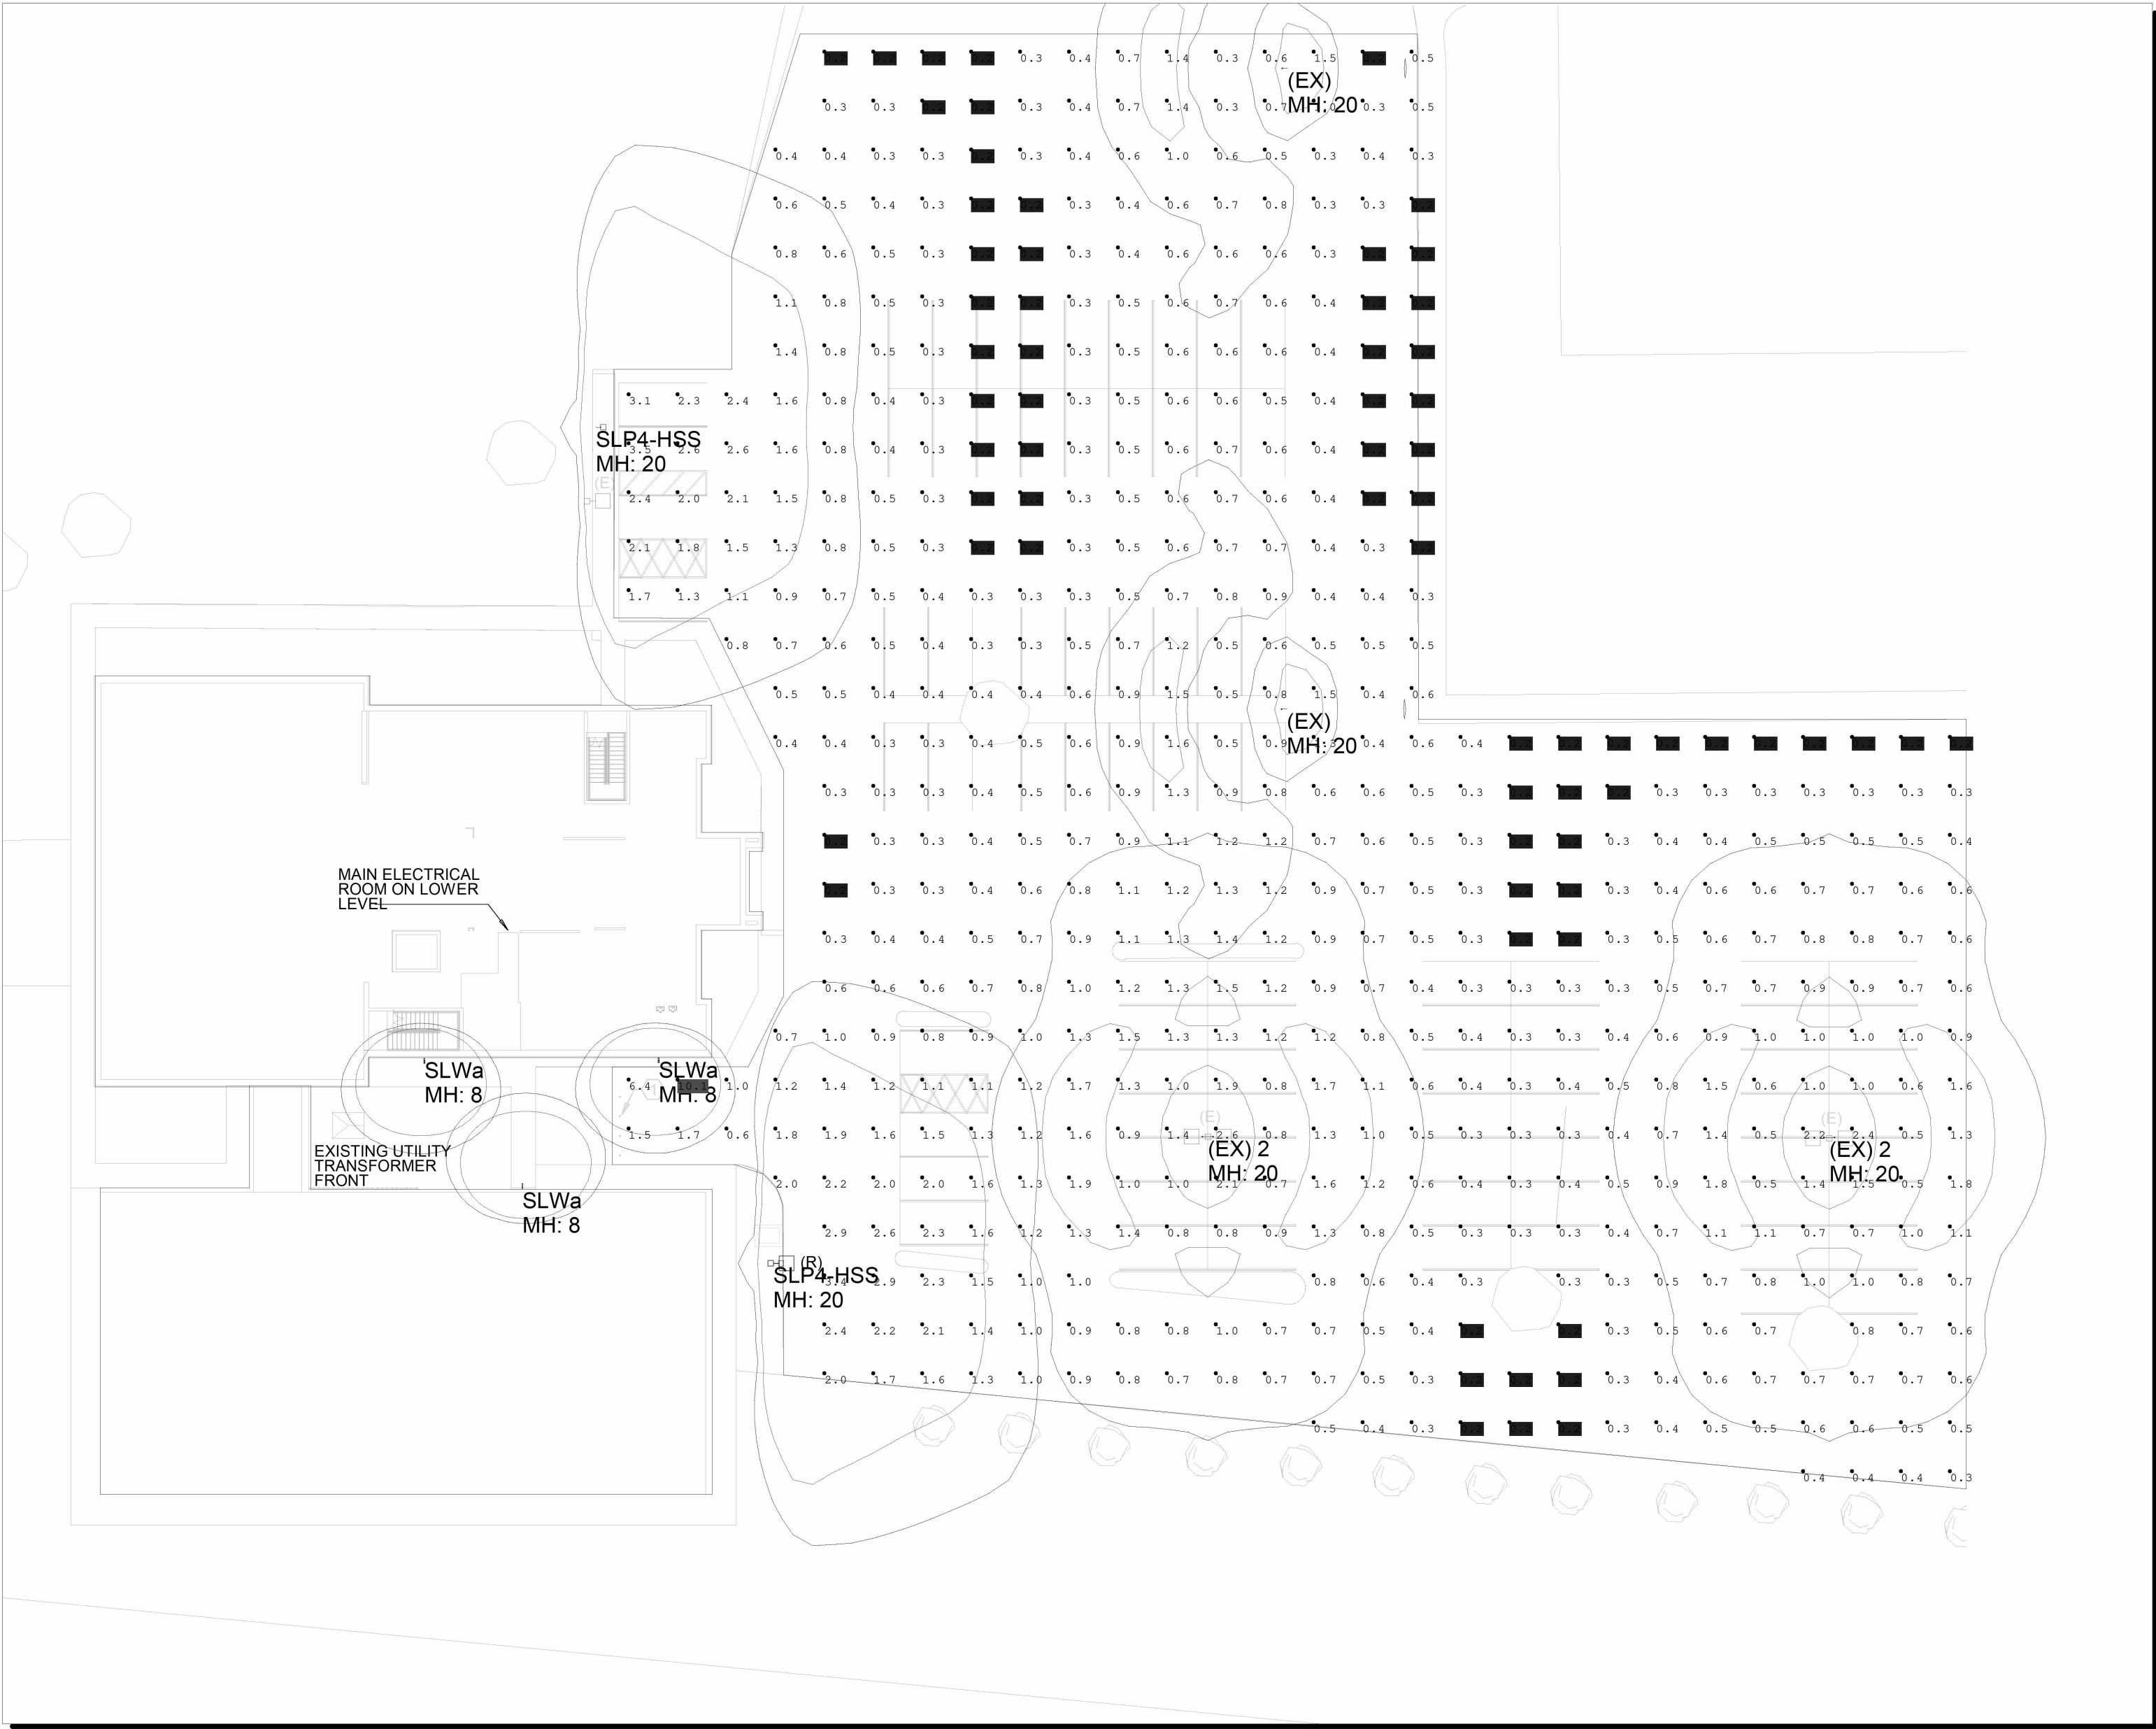

Site Plan
Scale: 1 inch= 20 Ft.

LUMINAIRE SCHEDULE - SITE											
TYPE	DESCRIPTION	LOAD	DIMMING DRIVER	VOLTAGE	LUMENS	CRI	CCT	BASIS OF DESIGN	EQUIVALENT MANUFACTURER	NOTES	
SLWa	7.5"x6"x3-5/8" DEEP WALL LUMINAIRE WITH ALUMINUM HOUSING, STAINLESS STEEL HARDWARE, SEALED AND GASKETED OPTICAL COMPARTMENT. INTEGRAL PHOTOCELL WITH AFTERHOURS DIMMING AND FINISH AS SELECTED BY ARCHITECT.	21 W	0-10V	UNV	2561	70	4000	LUMARK AXCS2A.PC. MSP/DIM-LXX	HUBBELL SG130.PCU STONCO PW LSI LIGHTING WPSLS LITHONIA OLWX1		

NEW POLE HEAD
SLP4-HSS



NEW WALL PACK
SLWa



EXISTING POLES

