

Julie Billiart School
Julie Billiart Westlake Expansion



3600 Crocker Rd.
Westlake, OH 44145



Issue Description:
Project Status
Revision Schedule
DATE DESCRIPTION


Project #: 25058
Issue Date: 05-15-2026

L100
Landscape Plan

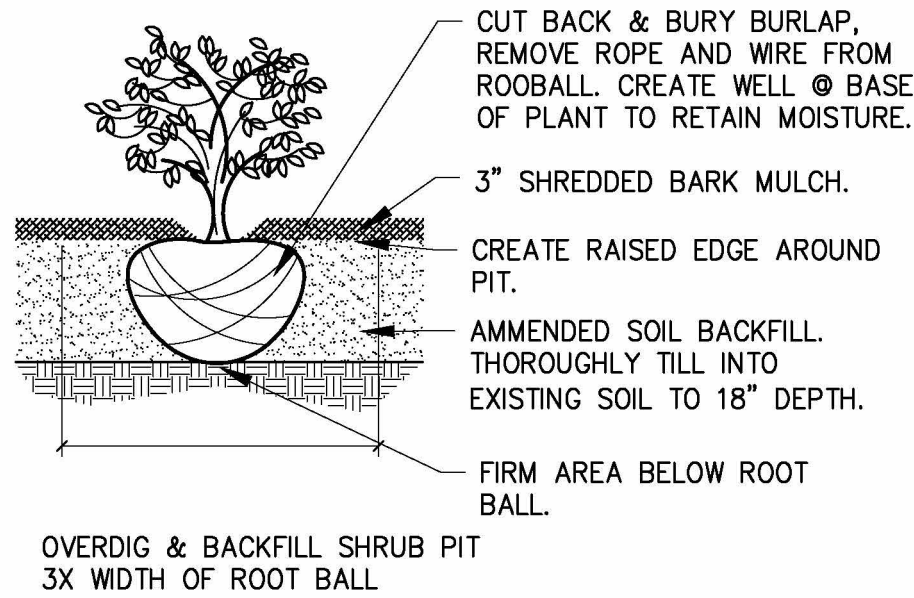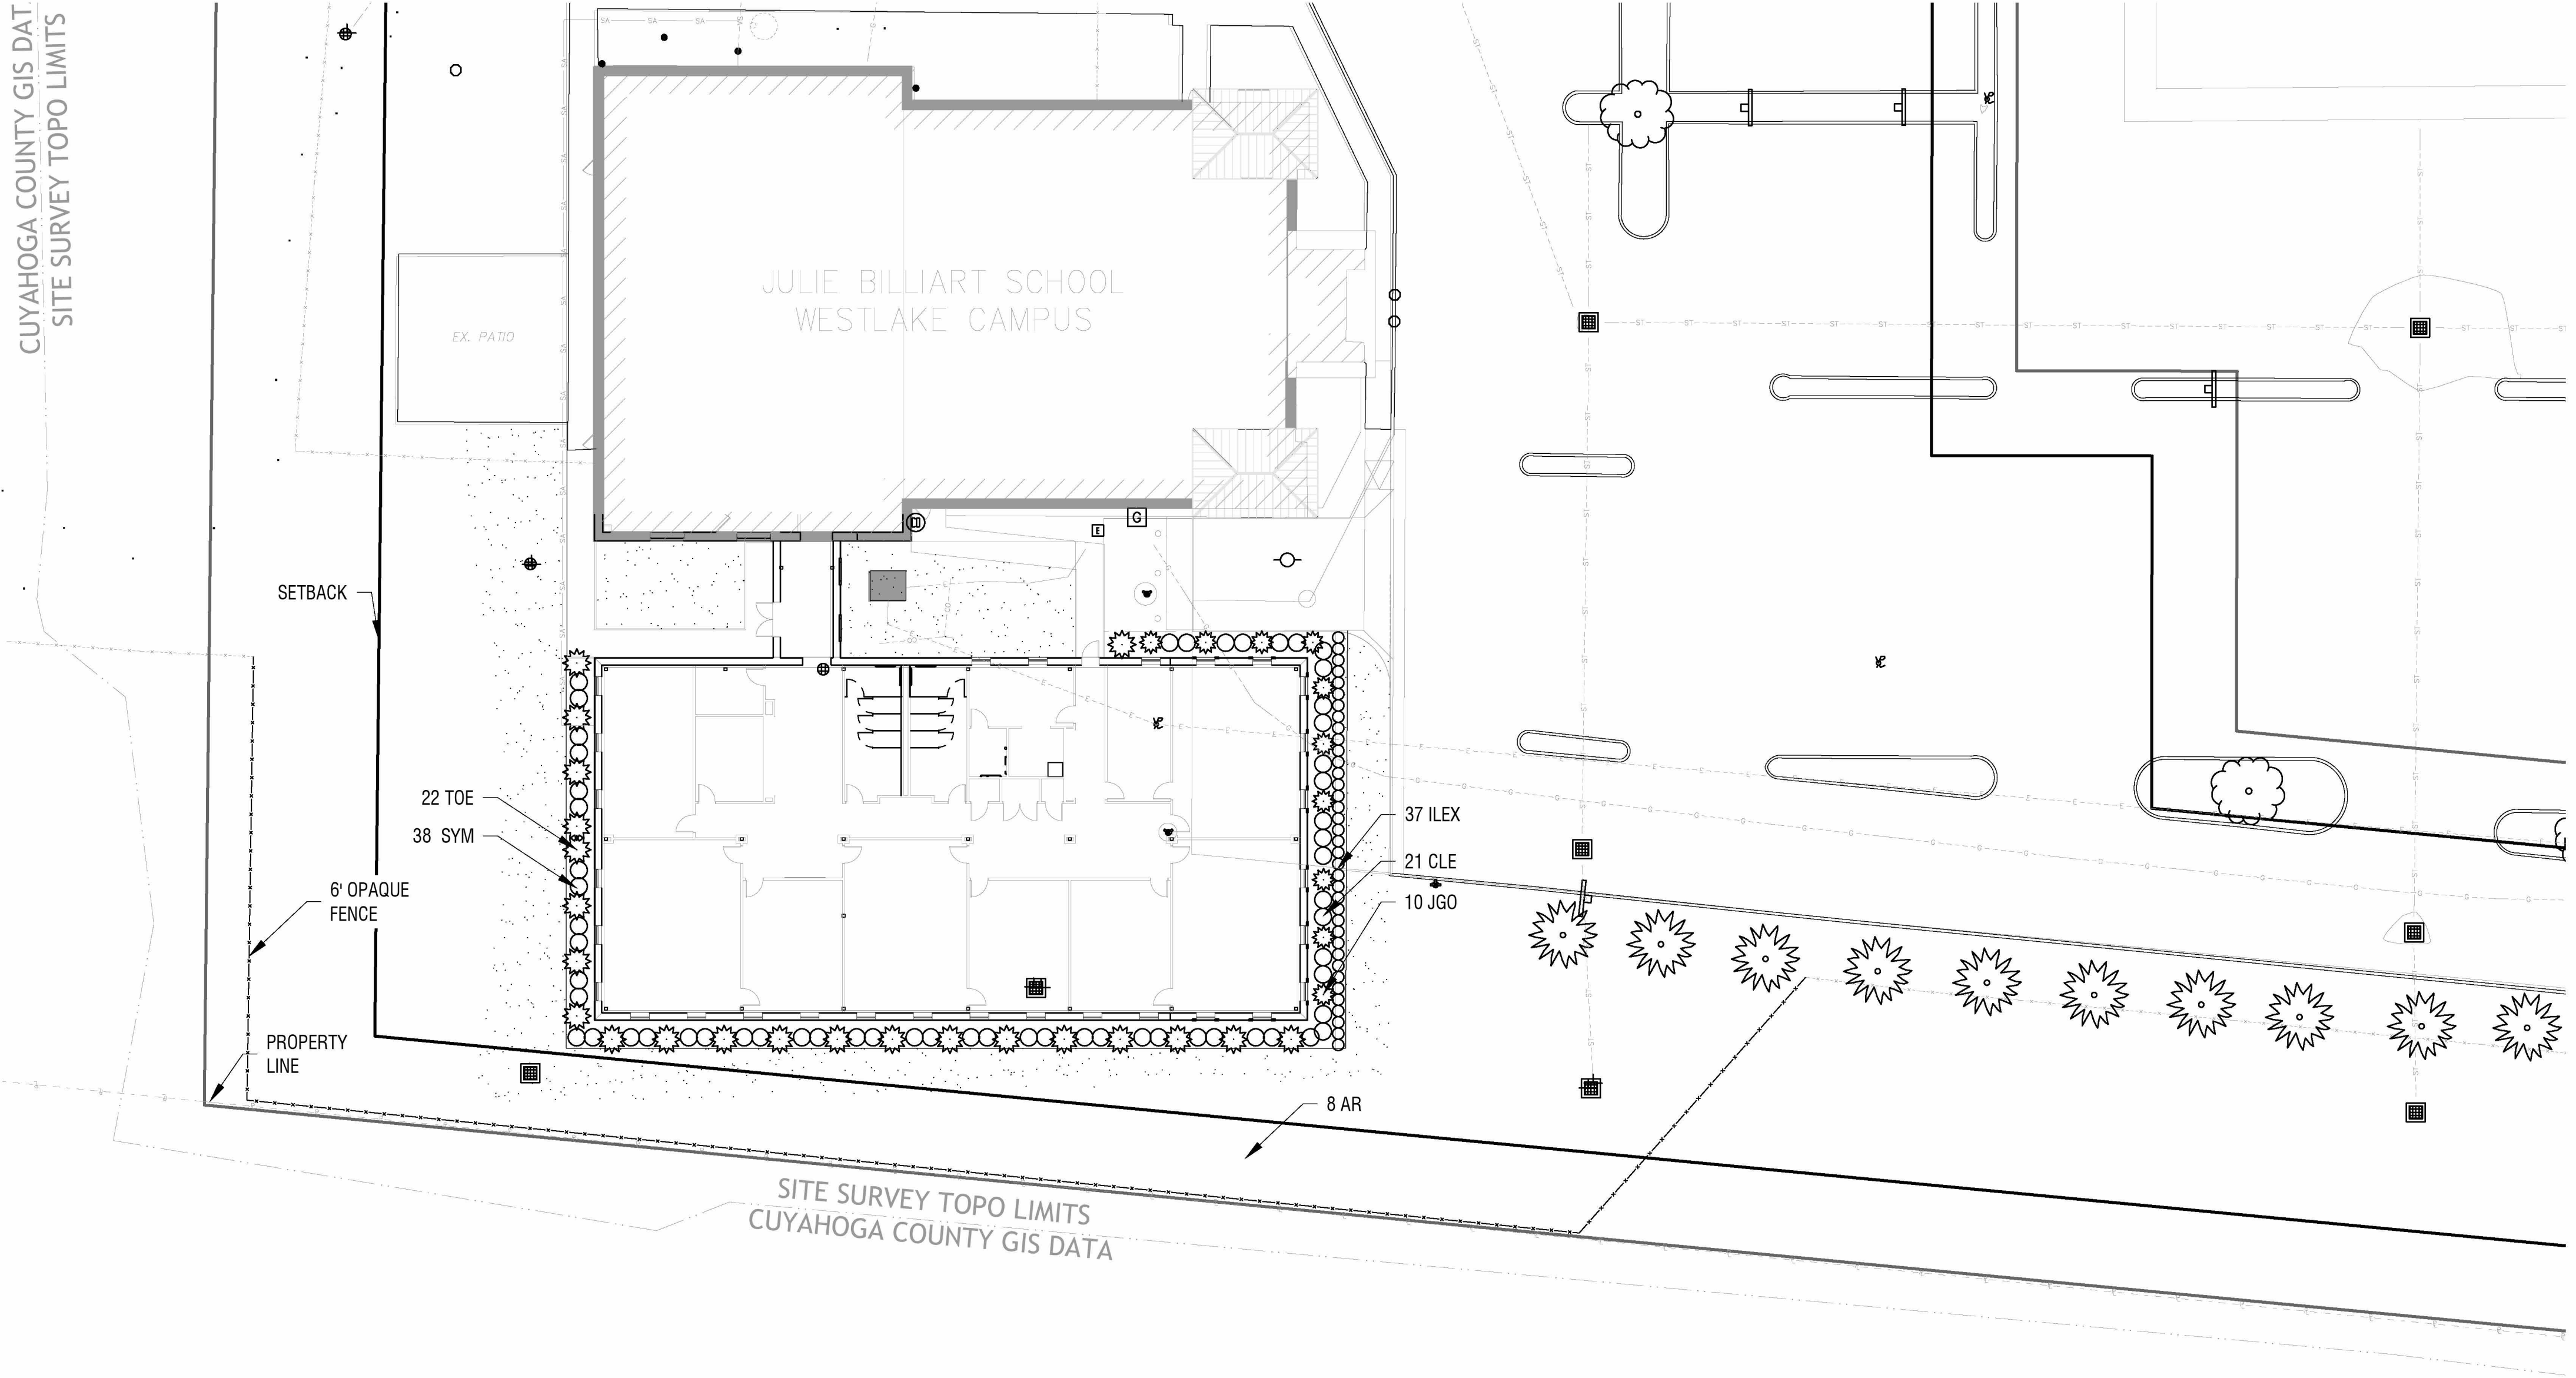

SHRUB PLANTING


Scale: 3/4" = 1'-0"

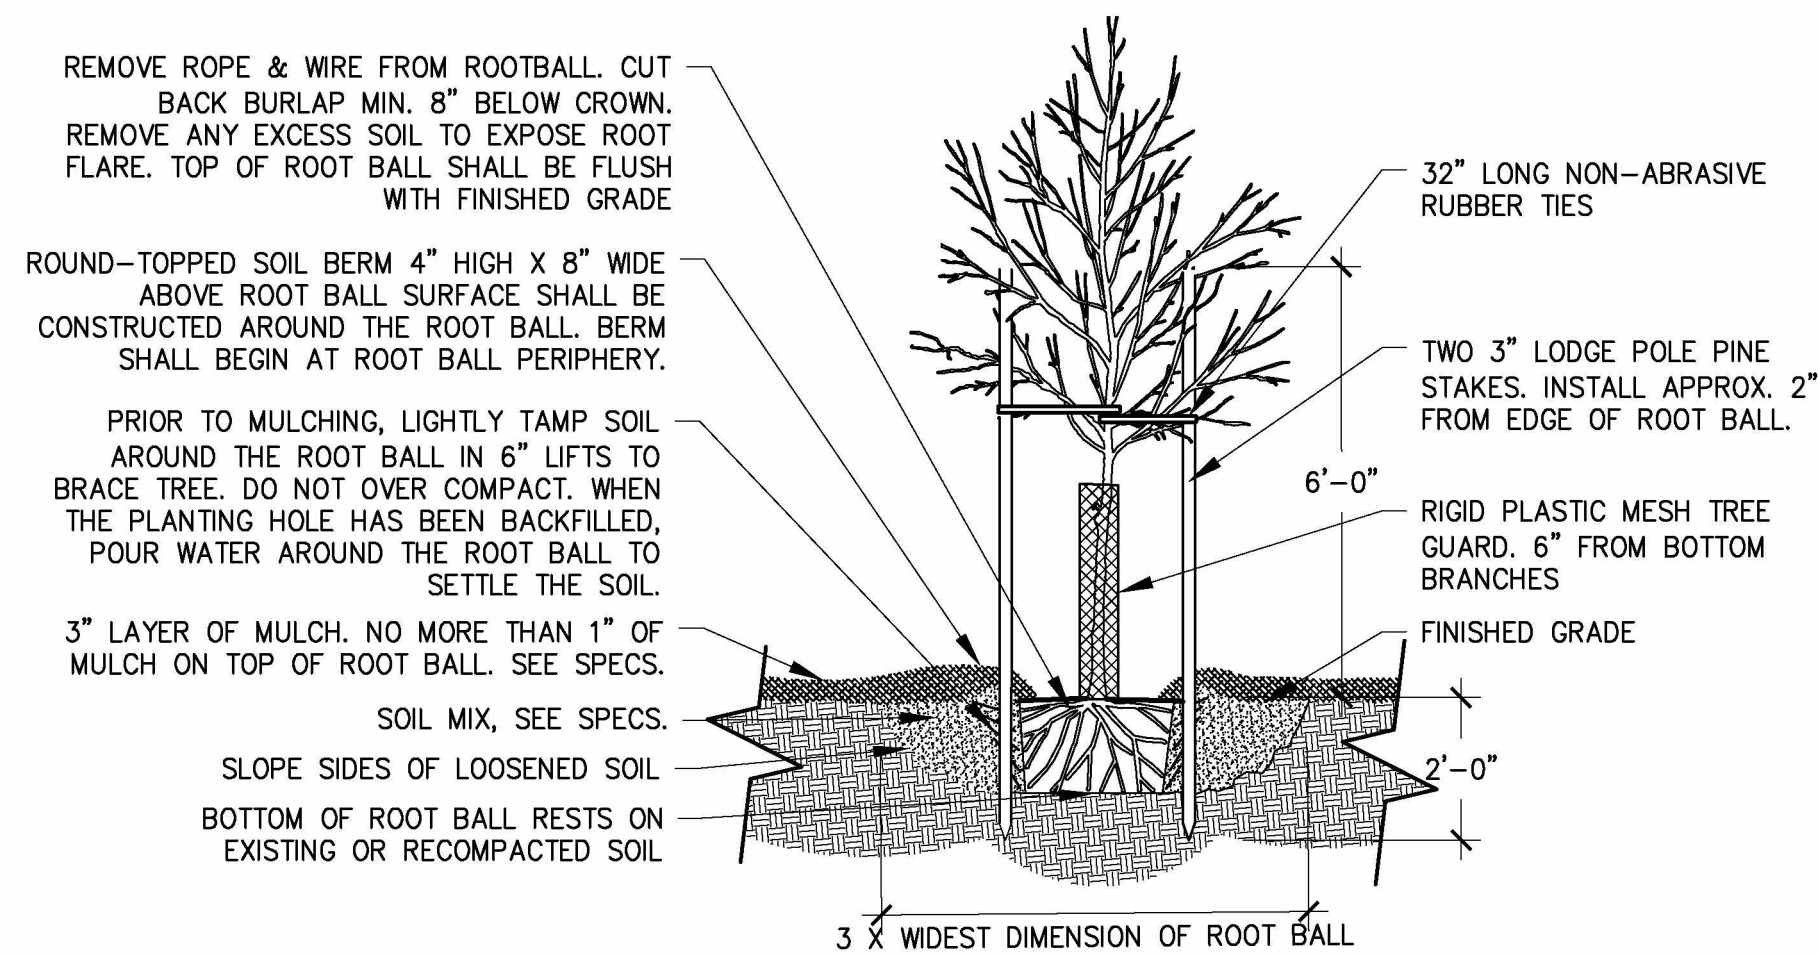

TREE PLANTING & STAKING

Scale: 3/8" = 1'-0"

Plant Schedule						
Key	Qty	Botanical / Common Name	Size	Cond.	Spacing	Height
Trees						
AR	8	Acer rubrum 'Red Sunset' / Red Maple	2.5" Cal.	B&B	See Plan	40'
Shrubs						
CLE	21	Clethra alnifolia 'Ruby Spice' / Ruby Spice Summersweet Clethra	30"	No. 3	5' O.C.	5'
ILEX	37	Ilex crenata 'Soft Touch' / Soft Touch Compact Japanese Holly			2' O.C.	2'
JGO	10	Juniperus pfitzeriana 'Kallay's Compact' / Kallay's Compact Juniper	30"	B&B	3' O.C.	2'-3'
SYM	38	Symphoricarpos orbiculatus / Coralberry			4' O.C.	3'-5'
TOE	21	Thuja occidentalis 'Elegantissima' / Elegantissima Arborvitae	8'	B&B	5' O.C.	10'-15'

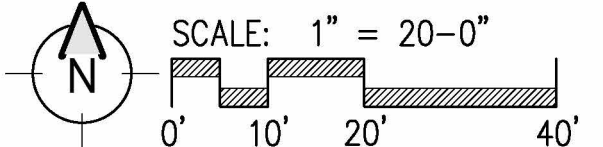

NOTES

- CONTRACTOR TO VERIFY CONDITIONS AND DIMENSIONS IN THE FIELD AND NOTIFY THE OWNER OR ARCHITECT OF DISCREPANCIES.
- CONTRACTOR IS RESPONSIBLE FOR PROVIDING PLANT QUANTITIES DETAILED ON PLAN. SCHEDULE PROVIDED FOR REFERENCE ONLY.
- PROVIDE A MIN. 3' DIAMETER MULCH BED AROUND EACH INDIVIDUAL TREE UNLESS TREES ARE INCORPORATED IN A PLANTING BED.
- ANY PLANT MATERIAL SUBSTITUTIONS TO BE VERIFIED AND APPROVED BY OWNER OR CONSULTANT PRIOR TO INSTALLATION.

PRELIMINARY