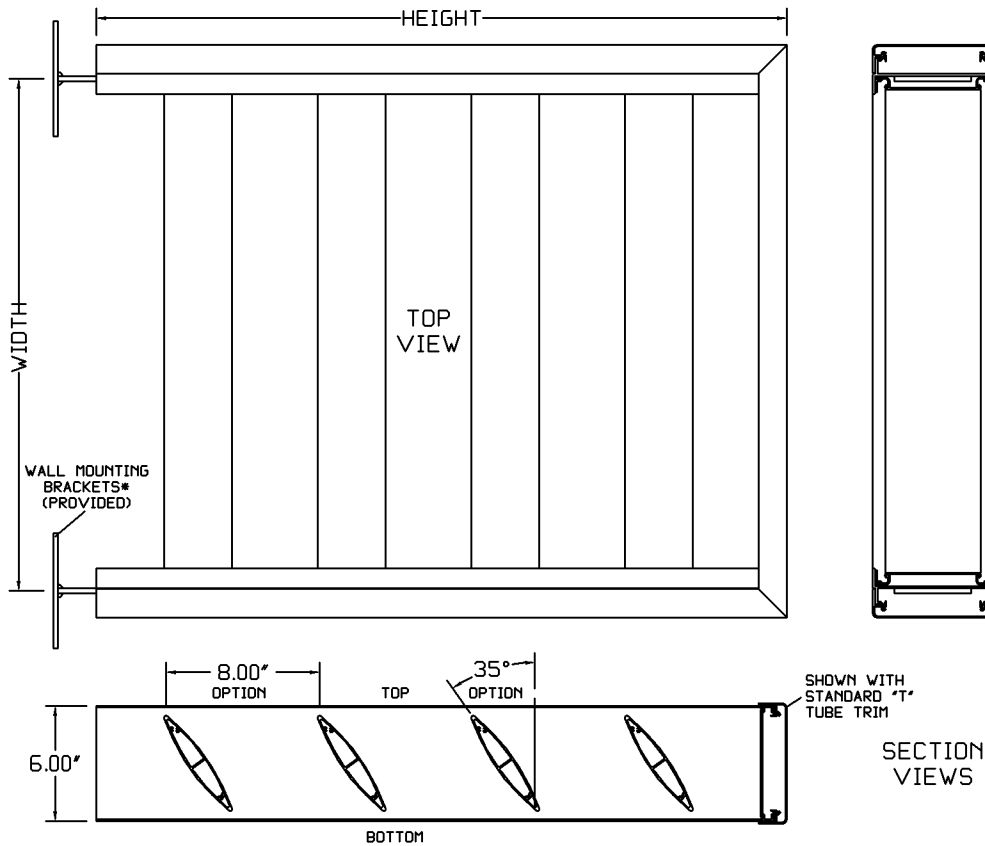


H6A - 6" DEEP AIRFOIL BLADE EXTRUDED ALUMINUM STATIONARY SUN SHADE



BLADE - 0.081\"
6063-T5 EXTRUDED ALUMINUM

FRAME - 0.081\"
6063-T5 EXTRUDED ALUMINUM

OUTRIGGERS - 0.125\"
TYPE 6063-T5 EXTRUDED ALUMINUM

DESIGNED FOR 30 PSF WIND LOAD

SIZES 12\"
UNLIMITED SIZE AVAILABLE

ALL FASTENERS CONCEALED FROM VIEW

OPTIONS:

VERTICAL OR HORIZONTAL ORIENTATION

MULLION CONNECTIONS FOR CONTINUOUS RUNS

MITERED CORNER JOINING PANELS

BLADE ANGLES 15°, 25°, 35°, OR 42°

BLADE SPACING 4\", 6\", OR 8\"

MOUNTING FOR VARIOUS WALL TYPES*











VARIOUS EDGE TRIM DESIGNS

HIGHER WIND LOAD RATINGS

ARCHITECTURAL FINISHES

* SEE MOUNTING OPTIONS TECHNICAL SHEET FOR WALL BRACKETS

** SEE OUTRIGGER OPTIONS TECHNICAL SHEET FOR OUTRIGGER TYPES AND SHAPES

CONSTRUCTION	TRIM	OUTRIGGER	BLADE SPACING	BLADE ANGLE	
STANDARD	 TUBE "T" TRIM	 "I" SHAPE OUTRIGGER			
OPTION	 BULLNOSE "B" TRIM	 FLAT OUTRIGGER	 4"  6"  8" SELECT ONE	 15°  25°  35°  42° SELECT ONE	
 266 W Mitchell Ave - Cincinnati, OH 45232 PH: (888) 568-8371 Fax: (888) 568-8370		PROJECT			
		CONTRACTOR			
		ARCHITECT			
		DRAWN BY: JRR	DATE: 11/19	DRAWING TYPE: TECHNICAL SHEET	DRAWING TITLE: H6A