


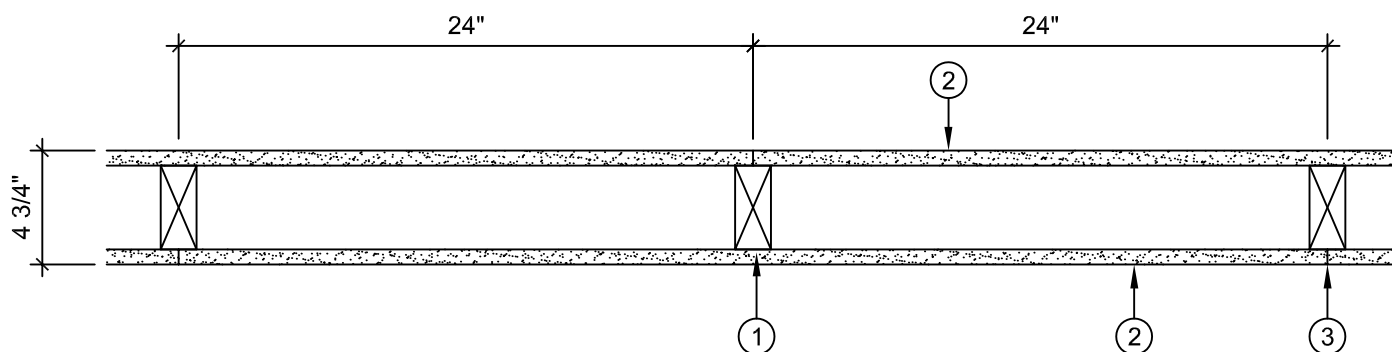

1. MIN. 2x4 WOOD STUDS 24" O.C.
2. 5/8" GOLD BOND FIRE-SHIELD GYPSUM BOARD (FSW, FSW-6, FSK) APPLIED VERTICALLY OR HORIZONTALLY AND FASTENED WITH 1-7/8" 6d NAILS 7" O.C. OR 1-1/4" TYPE W SCREWS 8" O.C. VERTICAL JOINTS CENTERED OVER STUDS AND STAGGERED 24" FROM OPPOSITE SIDE.
3. JOINT TAPE AND COMPOUND OVER JOINTS AND FASTENER HEADS (OPTIONAL WHEN SQUARE EDGE BOARD IS USED)

STC 38 - 2x4 WOOD STUDS

SOUND TEST: NGC 2404

DATE: 06/01/2026

UL DESIGN: U309

SCALE: 1-1/2"=1'-0"

LOADBEARING WOOD STUD PARTITION - 1 HOUR

National
Gypsum

© 2026 National Gypsum Services Company